




ORSY

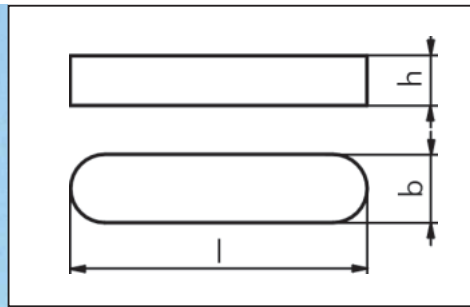

Pleištai DIN 6885


Medžiaga: plienas C45K
Be padengimo

b mm	h mm	l mm	Plienas Prek. Nr.	P.vnt.
3	3	20	00410 030 320	1000
4	4	15	00410 040 415	500
		30	00410 040 430	100
5	5	20	00410 050 520	100
		30	00410 050 530	100/200
		50	00410 050 550	100
6	6	20	00410 060 620	100
		22	00410 060 622	
		30	00410 060 630	200
		50	00410 060 650	
8	7	20	00410 080 720	200
		25	00410 080 725	
		30	00410 080 730	
		40	00410 080 740	
		45	00410 080 745	
		50	00410 080 750	
		60	00410 080 760	
		80	00410 080 780	
	100	00410 087 100	100	

b mm	h mm	l mm	Plienas Prek. Nr.	P.vnt.
10	8	25	00410 100 825	100
		30	00410 100 830	
		36	00410 100 836	
		40	00410 100 840	
		50	00410 100 850	
		60	00410 100 860	
		70	00410 100 870	
		80	00410 100 880	
	100	00410 108 100		
12	8	50	00410 120 850	50
		60	00410 120 860	25
		80	00410 120 880	
		90	00410 120 890	
14	9	56	00410 140 956	50
		80	00410 140 980	
16	10	90	00410 161 090	25



ORSY

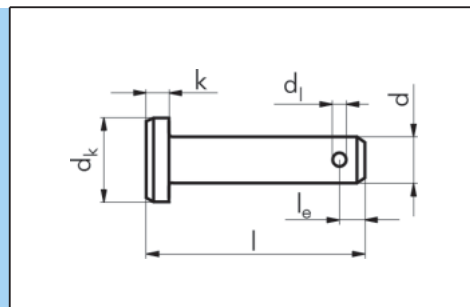

Kaiščiai su galvute

DIN 1434 (ISO 2341)

Plieniniai, baltai cinkuoti,
pasyvuoti

dk	k	l	le	d ₁	d	Plien. cink. Prek. Nr.	P. vnt.
12	2	22	3	2	8	00260 008	10
14	2	35	4	3,2	10	00260 001 01	
17	3	40	5	4	12	00260 001 21	
19	3	40	5	4	14	00260 001 4	
19	3	45	5	4	14	00260 001 42	